

Fischer Tropsch Synthesis Wastewater Treatment Study using DW SIM

M. Shireesha, Aradhyula Jatin Bhanu Shankar, P. Sarath, Kunchala Vishwajeeth, Danam Sohan Subodh, Shaik Imran

Abstract: This project focuses on utilizing DWSIM to treat wastewater from the Fischer Tropsch Process. A well-known technique for transforming synthesis gas, a combination of carbon monoxide and hydrogen, into liquid hydrocarbons is the Fischer-Tropsch process. However, this procedure creates wastewater, which if not adequately treated, includes a variety of chemicals that can be detrimental to aquatic life. To get rid of these contaminants and satisfy regulatory standards, the Fischer-Tropsch process requires water treatment. The most often employed therapeutic modalities are physical, pharmacological, and biological therapies. In order to maintain the Fischer-Tropsch process' sustainability and environmental friendliness, efficient and effective water treatment is essential. The Fischer-Tropsch process can continue to be an effective way to make liquid hydrocarbons while minimizing its negative effects on aquatic habitats with the right water treatment. As a result, the goal of this research is to examine the treatment process, determine the chemical oxygen demand (COD) level of Fischer Tropsch water obtained by distillation, reduce its concentration, and prepare the water for neutralization.

Keywords: Wastewater treatment, Fischer-Tropsch Process, Synthesis gas, Liquid hydrocarbons, Chemical contaminants, Aquatic life, Physical therapy, Pharmacological therapy, Biological therapy, Regulatory standards, Sustainability, Environmental friendliness, Chemical oxygen demand (COD), Distillation, Neutralization.

I. INTRODUCTION

A. Discovery of Fisher-Tropsch Process:

Franz Fischer and Hans Tropsch, two German chemists, created the Fischer-Tropsch (FT) procedure in 1925. They were looking for a method to transform coal into liquid fuels while working at the Kaiser Wilhelm Institute in Berlin.

Manuscript received on 15 July 2023 | Revised Manuscript received on 08 August 2023 | Manuscript Accepted on 15 November 2023 | Manuscript published on 28 February 2024.

*Correspondence Author(s)

M. Shireesha*, Department of Chemical Engineering, Anurag University, Ghatkesar, Medchal (Dist.), Hyderabad, Telangana, India. E-mail: shireesha811@gmail.com, ORCID ID: [0000-0003-4656-9836](https://orcid.org/0000-0003-4656-9836)

A. Jatin Bhanu Shankar, Department of Chemical Engineering, Anurag University, Ghatkesar, Medchal (Dist.), Hyderabad, Telangana, India. E-mail: jatin.aradhyula@gmail.com

P. Sarath, Department of Chemical Engineering, Anurag University, Ghatkesar, Medchal (Dist.), Hyderabad, Telangana, India. E-mail: podasarath8@gmail.com

K. Vishwajeeth, Department of Chemical Engineering, Anurag University, Ghatkesar, Medchal (Dist.), Hyderabad, Telangana, India. E-mail: k.jeeeth2002@gmail.com

D. Sohan Subodh, Department of Chemical Engineering, Anurag University, Ghatkesar, Medchal (Dist.), Hyderabad, Telangana, India. E-mail: sohansubodhdanam0212@gmail.com


Shaik Imran, Department of Chemical Engineering, Anurag University, Ghatkesar, Medchal (Dist.), Hyderabad, Telangana, India. E-mail: imranshaik2320@gmail.com

© The Authors. Published by Blue Eyes Intelligence Engineering and Sciences Publication (BEIESP). This is an open access article under the CC-BY-NC-ND license <http://creativecommons.org/licenses/by-nc-nd/4.0/>

Using metal catalysts, they created a procedure to transform synthesis gas, a combination of carbon monoxide and hydrogen, into liquid hydrocarbons. The Fischer-Tropsch method, as it came to be called, was a crucial technique for creating liquid fuels during World War II when Germany was cut off from conventional oil supplies,

II. REACTION MECHANISM:

A sequence of chemical processes are used in the Fischer-Tropsch process to create a range of hydrocarbons, preferably with the formula (C_nH_{2n+2}). Alkanes are created through the following more advantageous reactions.



Where n is typically 10–20. The formation of Fischer methane (n = 1) is unwanted.

A series of chemical processes known as the Fischer-Tropsch process transform syngas, a combination of hydrogen and carbon monoxide, into liquid hydrocarbons. At pressures of one to several tens of atmospheres and temperatures of 150–300 °C (30–572 °F), these reactions often take place in the presence of metal catalysts.

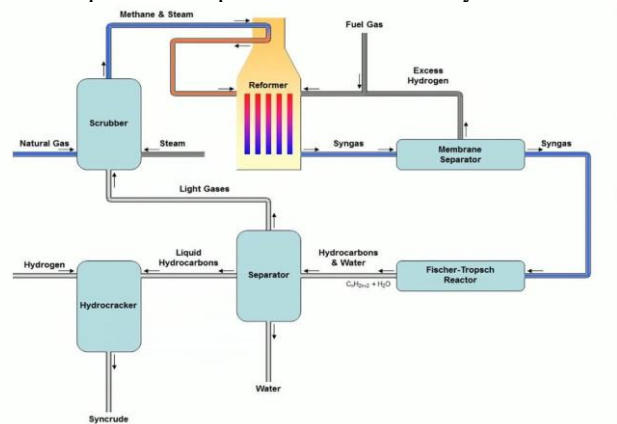


Fig. 1: Fischer-Tropsch (FT) Process

The Fischer-Tropsch (FT) process involves several steps:

1. Feedstock preparation: Before gasification, the carbon-based feedstock, such as coal, gas, or biomass, must first be ready.
2. Gasification: The feedstock is then gasified to create synthesis gas, also referred to as syngas, which is a combination of carbon monoxide and hydrogen. Many techniques, like steam generation or oxygen gasification, can be used to accomplish this.
3. Syngas cleaning: The syngas is next cleansed to get rid of particles, heavy metals, Sulphur and nitrogen compounds, and other contaminants. This is necessary to keep the catalyst active and avoid catalyst poisoning.



4. Fischer-Tropsch reaction: The cleaned syngas is next passed at high pressure and temperature over a metal catalyst, usually cobalt, iron, or ruthenium. The conversion of the synthesis gas into liquid hydrocarbons, predominantly paraffins and olefins, is facilitated by the metal catalyst through a sequence of reactions.
5. The unreacted syngas and other byproducts, including as water and carbon dioxide, are subsequently separated from the liquid hydrocarbons in step 5.
6. Product enhancement: The liquid hydrocarbons produced by the Fischer-Tropsch method are frequently unsuitable for use as fuels due to their low quality. As a result, the hydrocarbons must go through further processing in order to be upgraded into more valuable products such as petrol, diesel, or jet fuel.
7. Wastewater treatment: By eliminating impurities, water generated throughout the FT process, including that from the syngas cleaning and product separation operations, is made suitable for reuse or disposal.
8. Product refinement: The finished item is refined to the required standards for its intended application.

To optimize product quality and reduce waste formation, each stage of the FT process requires rigorous monitoring and control.

A. Applications of Fisher-Tropsch Process

The Fischer-Tropsch method is widely used in the manufacturing of synthetic fuels, notably diesel fuel and jet fuel. This is due to the process's ability to create high-quality, sulfur-free fuels with attributes equal to traditional petroleum-based fuels.

Other applications for the process include the manufacturing of waxes, lubricants, and other compounds. Furthermore, the Fischer-Tropsch method has been utilized to create synthetic natural gas, which may be used as a replacement for natural gas in a variety of applications.

Overall, the Fischer-Tropsch method has been employed in a wide range of commercial applications, most notably the manufacture of synthetic fuels and chemicals.

III. WATER

Water is a colorless, odorless, tasteless liquid that is essential for all known forms of life. It is the most common substance on Earth and covers approximately 71% of the planet's surface. Water is composed of two hydrogen atoms and one oxygen atom, giving it the chemical formula H₂O. It exists in three states: solid (ice), liquid (water), and gas (water vapor). Water is crucial for many processes in the human body, including digestion, circulation, and temperature regulation. It is also used for various purposes such as agriculture, industry, and transportation.

Selected Physical Properties of Water	
Molar Mass	18.0151 grams per mole
Melting Point	0.00 °C
Boiling Point	100.00 °C
Maximum Density (at 3.98 °C)	1.0000 grams per cubic centimeter
Density (25 °C)	0.99701 grams per cubic centimeter
Vapor Pressure (25 °C)	23.75 torr
heat of fusion (0 °C)	6.010 kilojoules per mole
heat of vaporization (100 °C)	40.65 kilojoules per mole
heat of formation (25 °C)	-285.85 kilojoules per mole
entropy of vaporization (25 °C)	118.8 joules per °C mole
viscosity	0.8903 centipoise
surface tension (25 °C)	71.97 dynes per centimeter

A. What is Chemical Oxygen Demand (COD)?

The amount of dissolved oxygen required in water to oxidize chemical organic compounds such as petroleum is known as the chemical oxygen demand (COD). COD is a measure of the short-term influence of wastewater effluents on the oxygen levels of receiving waters.

B. Why Measure Chemical Oxygen Demand (COD)?

When treated wastewater is released into the environment, it can bring organic pollutants into receiving waterways. High levels of COD in wastewater indicate organic quantities that might deplete dissolved oxygen in the water, resulting in significant environmental and regulatory repercussions. Oxygen demand is an important parameter for determining the impact and, eventually, limiting the quantity of organic pollutants in water.

C. Industrial uses of water:

Water is used in manufacturing and other sectors throughout the production process to create items or to cool the equipment used to create products. Wastewater and industrial water are byproducts of industrial or commercial activity. Water is necessary for practically every step of manufacturing across a wide range of businesses, whether it's the food we eat or the items we buy. The wastewater that results must be properly controlled.

Some industrial water applications include:

- **Manufacturing processes:** Water is utilized in a variety of manufacturing processes, including cleaning, cooling, and lubricating. It is also employed as a solvent for numerous compounds and in chemical processes.
- **Energy generation:** Water is utilized to generate energy in thermal power plants using hydropower and steam turbines.
- **Cleaning and sanitation:** Water is utilized in sectors such as food and beverage manufacturing, pharmaceuticals, and healthcare for cleansing and sanitation.
- **Agriculture:** Water is employed in the agricultural sector for irrigating as well as livestock watering.
- **Waste management:** Water can be utilized in waste disposal operations such as sewage treatment and industrial wastewater treatment.
- **Product quality:** Water is frequently used to make high-quality products in sectors such as textiles, paper, and electronics.
- **Sustainability:** Due to the scarcity of water, companies are increasingly focusing on lowering water usage and developing water management practices to ensure long-term sustainability.

IV. INDUSTRIAL WATER TREATMENT

Water has several industrial applications. Raw water entering an industrial plant frequently requires treatment to fulfil stringent quality standards. Meanwhile, used water must be treated before it can be reused or disposed of.



In a nutshell, an industrial water treatment system processes water to make it more suitable for a certain application, such as consumption, production, or disposal. Common industrial water treatment systems typically include:

- Raw water treatment systems
- Cooling tower treatment
- Wastewater treatment systems

A. Raw Water Treatment Systems:

Raw water treatment systems are used to pre-treat and optimize source water, often to increase production efficiency and process performance for specific applications. Raw water treatment generally removes suspended/colloidal particles, iron, bacteria, and hardness. Pre-treating cooling tower/boiler feed water, process/production water, and/or drinking water are some examples. Raw water treatment is frequently concerned with protecting downstream equipment against scaling, fouling, corrosion, and other types of damage or premature wear caused by pollutants in the source water.

B. Cooling Tower Treatment:

Cooling tower water treatment systems are used to prevent cooling tower components from damage caused by pollutants in feed water, circulation water, and/or blowdown water. Chlorides, hardness, iron, biological materials, silica, TDS, and/or TSS are examples of pollutants.

C. Wastewater Treatment Systems:

A wastewater treatment system is used in the industrial water context to convert waste streams into effluent that may be reused inside the operation or safely disposed to the environment. The complexity of the treatment system will be determined mostly by the compliance laws affecting the facility and the waste stream composition. However, in many activities, the following technologies are commonly used: clarity, disinfection, softening, and distribution.

D. Industrial Water Quality Requirements:

The standards for industrial water quality will vary greatly based on the use, locality, and local administration. Water required for food and beverage processing, for example, will differ from water required for oil and gas extraction and treatment. Even within these divisions, water quality varies across meals, such as dairy and confectionery, and drinks, such as soft drinks and alcoholic beverages. It is a challenging mix of quality criteria when combined with local rules and worldwide. Water in the food sector, on the other hand, should fulfil local criteria for safe drinking water or the World Health Organization (WHO) Guidelines for Drinking-water Quality.

Technologies used to treat industrial Wastewater:

There are several industrial water solutions available, and the decision will be influenced by a variety of criteria, including raw water quality in the region, regional legislation controlling the facility, the sort of product being processed, and the purity of water required, among others. For example, the solutions required to achieve ultrapure water for semiconductor manufacture will differ significantly from those required to treat waste water from pulp and paper manufacturing. Water solutions used for

municipal water treatment, such as membranes, is frequently employed for industrial purposes. Furthermore, due to the broader range of contaminants, concentrations, and temporal variability in industrial effluents, industrial water treatment options tend to be more diversified than municipal alternatives. Here are some common technologies used for the treatment of industrial Wastewater:

- **Physical Treatment:** Sedimentation, filtration, and screening are physical treatment methods used to remove suspended solids, oil and grease, and other big particles from wastewater. These techniques can be employed alone or in conjunction with other forms of therapy.
- **Chemical Treatment:** Chemical treatment techniques utilize chemicals to remove or *neutralize pollutants in wastewater*. Coagulation and flocculation are two common chemical treatment methods in which chemicals are introduced to waste water to generate flocs that may be readily removed.
- **Biological Treatment:** Microorganisms are used in biological treatment methods to break down organic materials in wastewater. Activated sludge treatment, trickling filters, and biological nutrient removal are all common biological treatment techniques.
- **Membrane Filtration:** Membrane filtration methods such as reverse osmosis, ultrafiltration, and nanofiltration remove pollutants from waste water by using a semi-permeable membrane. These methods are capable of removing a broad variety of pollutants, including as dissolved solids, germs, and viruses.
- **Advanced oxidation processes:** Advanced oxidation methods, such as ozonation and UV treatment, remove pollutants from waste water by chemical or physical interactions. These technologies have the potential to be useful in the removal of persistent organic pollutants and other contaminants that are difficult to remove using current approaches.
- **Zero liquid discharge:** The zero liquid discharge (ZLD) technique eliminates all pollutants from waste water, leaving only a solid residue that can be properly disposed of. Evaporation and crystallization are two ZLD methods that can be costly but effective for treating high-concentration wastewater streams.

V. ABOUT DW-SIM SOFTWARE

DWSIM is a CAPE-OPEN-compliant open-source chemical process simulator. It is compatible with Windows, Linux, and Mac OS. It enables us to do experiments and analyze data using sophisticated models and processes. DWSIM is based on the Microsoft.NET and Mono platforms, and it includes a graphical user interface (GUI), sophisticated thermodynamics calculations, reaction support, and petroleum characterization / hypothetical component creation capabilities.

With the Thermodynamic Models and Unit Operations listed below, DWSIM can model steady-state, vapor-liquid, vapor-liquid-liquid, solid-liquid, and aqueous electrolyte equilibrium processes.

- Thermodynamic models: Cool Prop, Peng–Robinson equation of state, Peng–Robinson-Stryjek-Vera (PRSV2), Soave–Redlich–Kwong, Lee-Kesler, Lee-Kesler-Plöcker, UNIFAC(-LL), Modified UNIFAC (Dortmund), Modified UNIFAC (NIST), UNIQUAC, NRTL, Chao-Seader, Grayson-Streed, Extended UNIQUAC, Raoult's Law, IAPWS-IF97 Steam Tables, IAPWS-08 Seawater, Black-Oil and Sour Water.
- Unit operations: CAPE-OPEN Socket, Spreadsheet, Custom (Iron Python Script), Mixer, Splitter, Separator, Pump, Compressor, Expander, Heater, Cooler, Valve, Pipe Segment, Shortcut Column, Heat exchanger, Reactors (Conversion, PFR, CSTR, Equilibrium and Gibbs), Distillation column, Simple, Refluxed and Reboiled Absorbers, Component Separator, Solids Separator, Continuous Cake Filter and Orifice plate.
- Utilities: Binary Data Regression, Phase Envelope, Natural Gas Hydrates, Pure Component Properties, True Critical Point, PSV Sizing, Vessel Sizing, Spreadsheet and Petroleum Cold Flow Properties.
- Tools: Hypothetical Component Generator, Bulk C7+/Distillation Curves Petroleum Characterization, Petroleum Assay Manager, Reactions Manager and Compound Creator.
- Process Analysis and Optimization: Sensitivity Analysis Utility, Multivariate Optimizer with bound constraints.
- Extras: Support for Runtime Python Scripts, Plugins and CAPE-OPEN Flowsheet Monitoring Objects.

A. DWSIM Environment

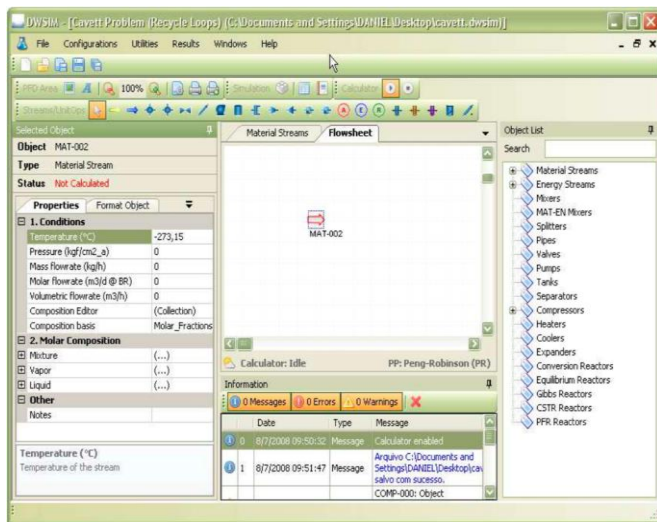


Fig. 2: Template Module

As initial stage we got a dialog box containing multiple categories and options to choose from based on our process parameters.

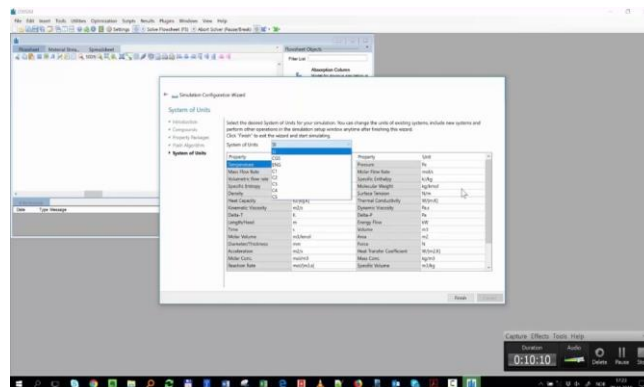


Fig. 3: Properties Tab

In this we can find the **components** tab where we give the required feed components by giving its *Id* or we can insert the components from DWSIM library by clicking on *find* button.

Example: Finding the Component Water on DWSIM, we get multiple options like Sea, heavy water etc.

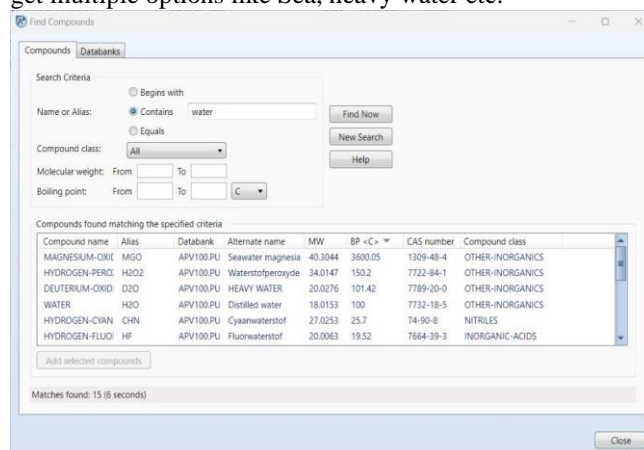


Fig. 4: Showing us the Multiple Components

We can add multiple components by clicking on add selected components, upon completion of selection click Close. On the top bar we can see options like Next, Run, Reset, etc. which help the simulation to run forward or backwards.

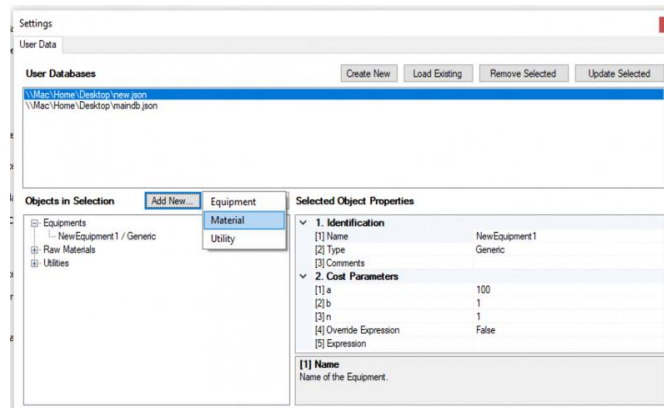


Fig. 5: Method tab

B. Simulation Tab:

In the model pallet the DWSIM has multiple designs for various components.

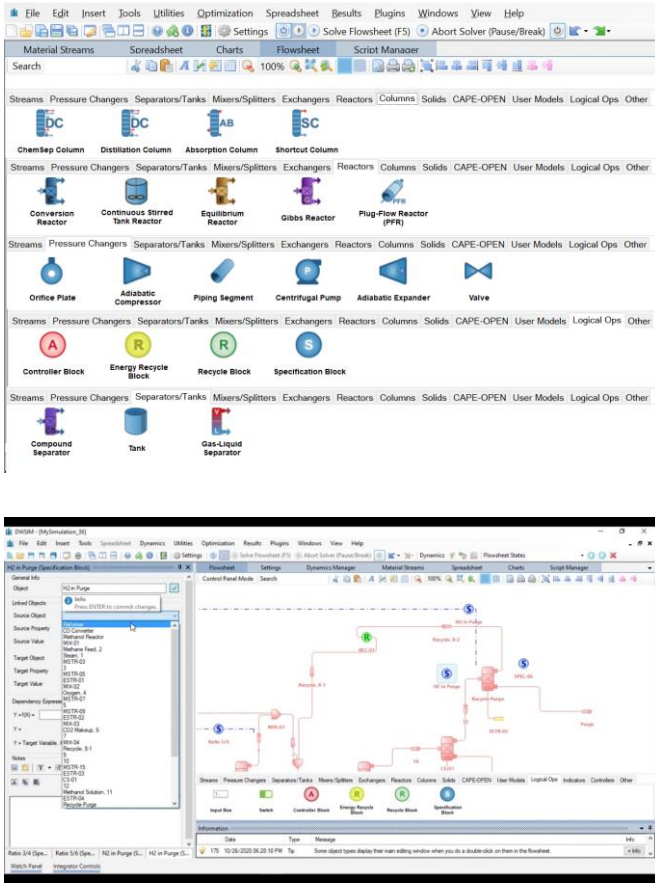


Fig. 6 & 7: Shows the Model Pallet in the DWSIM & the Simulation

VI. LITERATURE REVIEW

The Fisher-Tropsch process, according to the literature [1,] is a chemical reaction that transforms carbon monoxide and hydrogen gas into liquid hydrocarbons. Water, which is created as a byproduct of the interaction between carbon monoxide and hydrogen, has a substantial influence on the

environmental sustainability of the process. Water in the Fischer-Tropsch process can result in the development of undesirable byproducts such as alcohols, ethers, and carboxylic acids. These byproducts can diminish the output of desirable hydrocarbon products while also increasing the chemical oxygen demand (COD) of the process's wastewater. COD is a measure of how much oxygen is required to oxidize the organic stuff in wastewater. The greater the COD level, the more organic matter there is in the Wastewater, which might cause to dissolved oxygen reduction in the receiving water body. This, in turn, can have a negative impact on aquatic life and ecosystems. The COD levels in wastewater produced by the Fisher-Tropsch process are heavily influenced by operation parameters and the kind of catalyst utilized. greater COD levels in wastewater can be caused by greater temperatures and longer reaction periods. Furthermore, the use of some catalysts, such as cobalt and ruthenium, which cause the creation of VOC contaminants, might raise the COD levels in waste water.

A. The Main Problem for this Study

The literature [2][13] describes an investigation of the real process in a Malaysian industrial facility. The Fischer-Tropsch reaction generates a large volume of water, which is higher than the amount of hydrocarbon generated. The reaction produces two (2) phases: vapor and liquid. This process produced byproducts such as water vapor and alcohol for the C5 to C25 portion, and the aqueous stream contains corrosive contaminants. To avoid environmental issues, the produced water cannot be utilized or discarded without suitable treatment. The components of Fischer Tropsch water, such as alcohol, aldehydes, hydrocarbons, and ketone, do not behave well. These compounds are, in fact, more volatile than water. As a result, a distillation column is required to remove a non-acidic chemical from the reaction water, such as alcohols, aldehydes, and ketone.

Chemical	Chemical Group	Smell	pH	Corrosivity	COD Rate	Uses
Water	Inorganic	Odorless	7	Non-corrosive	Low	Various industrial, domestic, and agricultural applications
Carbon Dioxide	Inorganic	Odorless	5.5-7.5	Non-corrosive	Low	Carbonation of beverages, fire extinguishers, oil recovery, and more
Propionic Acid	Carboxylic Acid	Pungent, rancid	2.85	Corrosive	High	Food preservatives, flavoring agent, herbicide, and more
N-Valeric Acid	Carboxylic Acid	Pungent, rancid, sweaty	4.82	Corrosive	High	Flavoring agent, perfumes, and more
N-Hexanoic Acid	Carboxylic Acid	Rancid, cheese-like	4.82	Corrosive	High	Flavoring agent, food preservative, and more
N-Butyric Acid	Carboxylic Acid	Pungent, rancid, cheesy	4.82	Corrosive	High	Flavoring agent, food preservative, and more
Formic Acid	Carboxylic Acid	Pungent, acidic	2.2	Corrosive	High	Textile and leather processing, coagulant in the rubber industry, and more
Acetic Acid	Carboxylic Acid	Pungent, vinegar-like	2.4	Corrosive	High	Food preservative, pickling agent, and more
		Pungent,				Perfumes, flavors, and

Fischer Tropsch Synthesis Wastewater Treatment Study using DW SIM

Valeraldehyde	Aldehyde	fruity, floral	7.2	Non-corrosive	High	more
N-Propionaldehyd e	Aldehyde	Pungent, fruity, nutty	8.8	Non-corrosive	High	Perfumes, flavors, and more
N-Butyraldehyde	Aldehyde	Pungent, fruity, nutty	7.2	Non-corrosive	High	Flavoring agent, perfumes, and more
Acetaldehyde	Aldehyde	Pungent, fruity, floral	7	Non-corrosive	High	Chemical intermediate, food flavoring, and more
Methyl-n- propyl- ketone	Ketone	Pungent, minty, fruity	7	Non-corrosive	High	Solvent for lacquers, paints, and varnishes, and more
Methyl-ethyl- ketone	Ketone	Sweet, fruity, acetone-like	7	Non-corrosive	High	Solvent for paints, adhesives, and coatings, and more
Acetone	Ketone	Sweet, fruity, acetone-like	7	Non-corrosive	Low	Solvent for paints, adhesives, and coatings, and more
2-Hexanone	Ketone	Sweet, fruity, acetone-like	7	Non-corrosive	High	Solvent for resins, waxes, and coatings, and more
1-Propanol	Alcohol	Mild, sweet, alcoholic	7.2	Non-corrosive	High	Solvent for paints, coatings, and inks, and more

Chemical	Chemical Group	Smell	pH	Corrosivity	COD Rate	Uses
Methanol	Alcohol	Pungent, alcoholic, somewhat sweet	7	Non-corrosive	High	Solvent for fuels, antifreeze, and formaldehyde production, and more
Isopropyl Alcohol	Alcohol	Mild, sweet,alcoholic	7	Non-corrosive	High	Solvent for cleaning agents, hand sanitizers, and more
Ethanol	Alcohol	Pungent, alcoholic, somewhat sweet	7.2	Non-corrosive	High	Solvent for perfumes, medicines, and fuels, and more
N-Butanol	Alcohol	Sweet, fruity, somewhat pungent	7.2	Non-corrosive	High	Solvent for paints, coatings, and resins, and more
1-Pentanol	Alcohol	Sweet, slightlyfloral	7.2	Non-corrosive	High	Solvent for perfumes, flavors, and cleaning agents, and more
1-Hexanol	Alcohol	Sweet, slightlyfloral	7.2	Non-corrosive	High	Solvent for flavors, perfumes, and disinfectants, and more

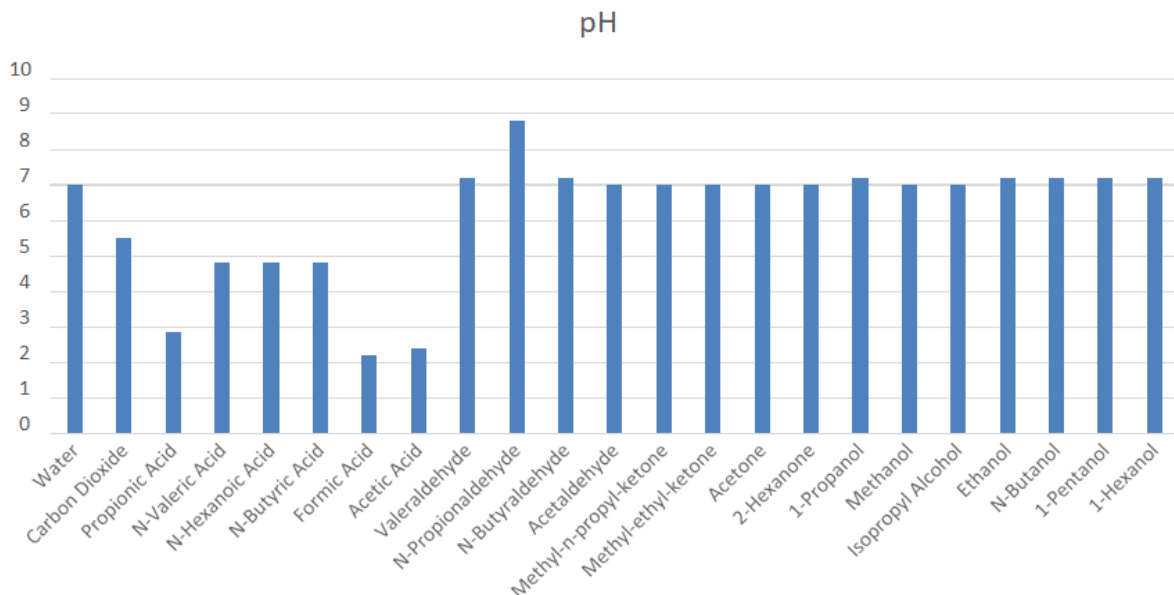


Fig. 8: These Tabulate Data Is Been Made as Per References

As per the data we can see that we need to remove or reduce the Carboxylic acids which are Corrosive and also remove the aldehydes, alcohols, and ketones etc. which cause an impact on COD values of water. This must be done in order for water to reuse or recycle in the process plants as these effect the process state norconditions of the system.

VII. MATERIALS AND METHODS

The analysis software we used was DWSIM V10 for process simulation and optimization which is perfectly suitable for Chemical industry.

A. Feed Components:

Component ID	Type	Component Name	Alias
WATER	Conventional	WATER	H2O
CARBO-01	Conventional	CARBON-DIOXIDE	CO2
PROPI-01	Conventional	PROPIONIC-ACID	C3H6O2-1
N-VAL-01	Conventional	N-VALERIC-ACID	C5H10O2-1
N-HEX-01	Conventional	N-HEXANOIC-ACID	C6H12O2-D5
N-BUT-01	Conventional	N-BUTYRIC-ACID	C4H8O2-1
FORMI-01	Conventional	FORMIC-ACID	CH2O2
ACETI-01	Conventional	ACETIC-ACID	C2H4O2-1
VALER-01	Conventional	VALERALDEHYDE	C5H10O-1
N-PRO-01	Conventional	N-PROPIONALDEHYDE	C3H6O-3
N-BUT-02	Conventional	N-BUTYRALDEHYDE	C4H8O-1
ACETA-01	Conventional	ACETALDEHYDE	C2H4O-1
METHY-01	Conventional	METHYL-N-PROPYL-KETONE	C5H10O-2
METHY-02	Conventional	METHYL-ETHYL-KETONE	C4H8O-3
ACETO-01	Conventional	ACETONE	C3H6O-1
2-HEX-01	Conventional	2-HEXANONE	C6H12O-D3
1-PRO-01	Conventional	1-PROPANOL	C3H8O-1
METHA-01	Conventional	METHANOL	CH4O
ISOPR-01	Conventional	ISOPROPYL-ALCOHOL	C3H8O-2
ETHAN-01	Conventional	ETHANOL	C2H6O-2
N-BUT-03	Conventional	N-BUTANOL	C4H10O-1
1-PEN-01	Conventional	1-PENTANOL	C5H12O-1
1-HEX-01	Conventional	1-HEXANOL	C6H14O-1

B. Method Selection

As per the components in the water there are only 2 suitable methods that helps insimulation. The methods are:

- NRTL
- UNIQUAC HOC

C. NRTL method (Non-Random Two-Liquid)

The NRTL (Non-Random Two-Liquid) approach is a thermodynamic model used to calculate the activity coefficients of mixture components. It is frequently used to simulate the behavior of non-ideal organic chemical combinations. Renon and Prausnitz created the NRTL approach in 1968, and it is based on the premise that deviations from optimal behavior in a mixture are caused by interactions between molecules of various components. The NRTL approach takes into consideration the size, shape, and polarity of molecules.

In the chemical and process industries, the NRTL approach has a variety of uses. Among the most popular applications of the NRTL approaches are:

1. Design and Optimization of Distillation Columns:

The NRTL technique is used to compute the activity coefficients of mixture components, which is an important parameter in the construction and optimization of distillation columns. The NRTL approach aids in the optimization of distillation operations and the reduction of energy usage by

precisely anticipating the behavior of mixes.

2. **Solvent Selection in Extraction Processes:** The NRTL technique is used in extraction operations to determine the best solvent for a certain application. The NRTL approach can assist to optimize the extraction process and maximize yields by properly anticipating the behavior of mixtures.
3. **Design of Chemical Processes:** The NRTL approach is used in chemical process design to anticipate mixture behavior and optimize process parameters. This can assist to minimize the time and expense of process development while also increasing the overall efficiency of chemical processes.
4. **Prediction of Thermodynamic Properties:** The NRTL approach may predict a variety of thermodynamic parameters, such as activity coefficients, vapor-liquid equilibrium, and liquid-liquid equilibrium. This data is essential for the design and optimization of many chemical processes.

Overall, the NRTL technique is an effective tool for forecasting the behavior of non-ideal mixes in a variety of chemical and industrial applications. Its simplicity and precision make it a popular option among chemical engineers and scientists.

D. UNIQUAC HOC Method

The UNIQUAC HOC (Hierarchy of Orders of Contribution) method is an extension of the UNIQUAC (UNIversal QUAsiChemical) model for predicting the activity coefficients of components in a mixture. The UNIQUAC HOC method is particularly useful for mixtures containing highly asymmetric and associating components, such as alcohols, organic acids, and water.

The UNIQUAC model is a group contribution method that uses the interaction parameters between groups of molecules to calculate activity coefficients. The UNIQUAC HOC model extends this concept by incorporating a hierarchy of orders of contribution to the interaction parameters. The hierarchy is based on the degree of association of the components in the mixture, with higher orders of contribution accounting for stronger associations. The UNIQUAC HOC model consists of two main steps:

- 1. Calculation of the Interaction Parameters:** The interaction parameters between the groups of molecules are calculated based on experimental data. The interaction parameters are then organized into a hierarchy of orders of contribution based on the degree of association of the components.
- 2. Calculation of the Activity Coefficients:** The activity coefficients of the components in the mixture are calculated using the interaction parameters and the UNIQUAC equation. The UNIQUAC HOC model takes into account the hierarchy of orders of contribution in the calculation of the activity coefficients, which improves the accuracy of the model for mixtures containing highly asymmetric and associating components.

The UNIQUAC HOC method has been shown to provide significantly improved accuracy over the original UNIQUAC model for mixtures containing highly asymmetric and associating components. It is widely used in the chemical and process industries for the design and optimization of processes involving such mixtures.

E. Input Constraints

Temperature (C)	100
Pressure (bar)	1.3
Input feed Mass flow rate (Kg/hr)	100000
Number of stages	20
Feed stage	5
Reflux ratio	5
Distillate to feed mole ratio	0.9
Condenser pressure [bar]	1.1
Reboiler pressure [bar]	1.4

F. Feed Inputs in Terms of Mass Fractions

WATER	0.98833
CARBO-01	0.0002
PROPI-01	1.00E-05
N-VAL-01	3.00E-05
N-HEX-01	1.00E-05
N-BUT-01	2.00E-05

FORMI-01	0.0001
ACETI-01	0.0008
VALER-01	0.0006
N-PRO-01	0.0003
N-BUT-02	0.0003
ACETA-01	0.0008
METHY-01	0.0001
METHY-02	0.0003
ACETO-01	0.001
2-HEX-01	3.00E-05
1-PRO-01	0.0012
METHA-01	0.005
ISOPR-01	0.0001
ETHAN-01	4.00E-05
N-BUT-03	0.00055
1-PEN-01	0.00017
1-HEX-01	1.00E-05

G. Process

1. Open the simulation and select a black simulation with metric units.
2. Check the properties tab is opened.
3. In the set up make the option as Wastewater and select next.
4. Add all the components by their component Id or by manually finding it.
5. Select the base method as NRTL and click next.
6. Next click on the simulation tab and design the flowsheet.
7. Add a feed line, mixer and Distillation column (DISTL) and connect to each other

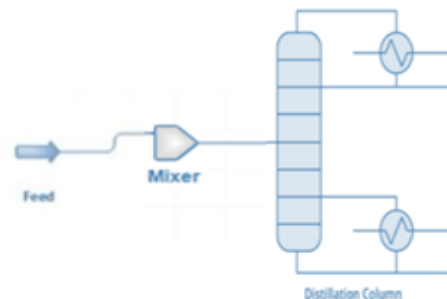


Fig. 9: A Feed Line, Mixer, and Distillation Column

8. Now enter the feed components (Inputs) by their mole fractions as mentioned above.
9. Now in the distillation column enter the number of stages, feed stage, and reflux ratio, distillate to feed mole ratio, condenser and reboiler pressure.
10. Add the property as Chemical Oxygen Demand (COD) in display options.
11. Run the simulation and check for status.
12. As the simulation runs successfully, we can have the results at left as stream summary.
13. Check the water and COD mixture in terms of fractions.

		Material		
Stream Name	Units	FEED	UP	WASTE H2O
Description				
From				B1
To		B1		B1
Stream Class			CONVEN	CONVEN
Maximum Relative Error				
Cost Flow	\$/hr			
MIXED Sub stream				
Phase		Liquid Phase	Liquid Phase	Liquid Phase
Temperature	C	100	95.0612	109.351
Pressure	bar	1.3	1.2	1.4
Molar Enthalpy	kcal/mol	-66.8297	-66.7988	-66.7029
Mass Enthalpy	kcal/kg	-3684.1	-3631.66	-3699.26
Molar Entropy	cal/mol-K	-34.8837	-35.2796	-34.3696
Mass Entropy	cal/gm-K	-1.92302	-1.91805	-1.9061
Molar Density	kmol/cum	50.4613	49.7067	50.3675
Mass Density	kg/cum	915.369	914.28	908.197
Enthalpy Flow	Gcal/hr	-368.41	-110.472	-257.398
Average MW		18.14	18.3935	18.0314
Mass Flows	kg/hr	100000	30419.2	69580.8
Mass Fractions				
WATER		0.98833	0.964597	0.998705
Volume Flow	cum/hr	109.246	33.2712	76.6143
COD Chemical oxygen demand for mixture	fraction	0.0213103	0.0671229	0.00128209

As we can see, a large volume of water is lost since it was supplied as the top fraction, and the COD levels of the top fraction are higher than the bottom. To reflux water from the top to the distillation column, we must include a Separator and Pump in the design flow sheet and link the top portion of the distillation column to the Separator.

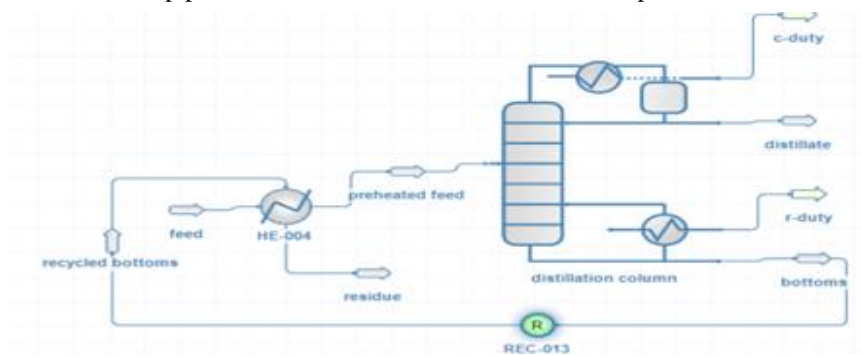


Fig. 10: Shows Portion of the Distillation Column to the Separator

In the Separator the temperature to 95 degrees and pressure to 1.1 bar. Now apply the pressure to 1.2 bar to Pump and connect the bottoms of Separator to pump. From pump recycle it back to the mixer. Now run the simulation check for the results. Rerun the simulation for both methods and compare it both of them.

VIII. DISTILLATION COLUMN OUTPUT DATA

Name	B1
Property method	NRTL
Henry's component list ID	
Electrolyte chemistry ID	
Use true species approach for electrolytes	YES
Free-water phase properties method	STEAM-TA
Water solubility method	3
Number of stages	20
Feed stage	5
Reflux ratio	4
Distillate to feed mole ratio	0.3
Condenser pressure [bar]	1.2
Reboiler pressure [bar]	1.4
Condenser duty [Gcal/hr]	113.2665
Reboiler duty [Gcal/hr]	114.1513
Feed stage temperature [C]	105.7479
Top stage temperature [C]	92.69132
Bottom stage temperature [C]	109.3474
Feed quality	-0.005056
Total feed stream CO2e flow [kg/hr]	22.20964
Total product stream CO2e flow [kg/hr]	22.20964
Net stream CO2e production [kg/hr]	0

Name	B1
Property method	UNIQUAC
Henry's component list ID	
Electrolyte chemistry ID	
Use true species approach for electrolytes	YES
Free-water phase properties method	STEAM-TA
Water solubility method	3
Number of stages	20
Feed stage	5
Reflux ratio	4
Distillate to feed mole ratio	0.3
Condenser pressure [bar]	1.2
Reboiler pressure [bar]	1.4
Condenser duty [Gcal/hr]	112.507402
Reboiler duty [Gcal/hr]	113.358721
Feed stage temperature [C]	105.73984
Top stage temperature [C]	92.5858671
Bottom stage temperature [C]	109.349059
Feed quality	-0.006054286
Total feed stream CO2e flow [kg/hr]	21.2292929
Total product stream CO2e flow [kg/hr]	21.2292929
Net stream CO2e production [kg/hr]	0

IX. NRTL Method

Stream Name	Units	Material				
		FEED	UP	WASTE20	SEPUP	SEPDOWN
Mass Fractions						
WATER		0.98833	0.903811	0.999231	0.545745	0.924445
CARBO-01		0.0002	0.000470026	0	0.0083198	1.77E-05
PROPI-01		1.00E-05	6.09E-05	9.30E-06	3.86E-05	6.22E-05
N-VAL-01		3.00E-05	2.49E-07	3.07E-05	3.23E-08	2.62E-07
N-HEX-01		1.00E-05	0.000650203	4.55E-06	0.00023021	0.00067441
N-BUT-01		2.00E-05	0.000328764	1.55E-05	0.00020344	0.00033599
FORMI-01		0.0001	0.000164065	9.97E-05	0.00011114	0.00016712
ACETI-01		0.0008	0.0109139	0.00060876	0.00856472	0.0110493
VALER-01		0.0006	0.00198678	0	0.0249594	0.00066294
N-PRO-01		0.0003	0.000905237	0	0.0124797	0.00023824
N-BUT-02		0.0003	0.00132048	0	0.0124797	0.00067741
ACETA-01		0.0008	0.00239216	0	0.0332792	0.00061224
METHY-01		0.0001	0.000311436	0	0.0041599	8.97E-05
METHY-02		0.0003	0.00113352	0	0.0124797	0.00047967
ACETO-01		0.001	0.00458499	0	0.0415989	0.00245199
2-HEX-01		3.00E-05	8.47E-05	0	0.00124797	1.76E-05
1-PRO-01		0.0012	0.00812116	0	0.0499186	0.0057125
METHA-01		0.005	0.0579389	1.84E-14	0.207994	0.0492918
ISOPR-01		0.0001	0.000542265	0	0.00415989	0.00033379
ETHAN-01		4.00E-05	0.000340899	0	0.00166395	0.00026466
N-BUT-03		0.00055	0.00307311	0	0.0228794	0.00193174
1-PEN-01		0.00017	0.000814333	0	0.0070718	0.00045374
1-HEX-01		1.00E-05	5.12E-05	0	0.00041599	3.02E-05
Volume Flow	cum/hr	109.246	48.7936	107.455	2731.6	46.0857
Chemical oxygen demand for mixture	fraction	0.0213103	0.161036	0.00079823	0.854075	0.121099

H. UNIQUAC HOC Method

Stream Name	Units	Material				
		FEED	UP	WASTE20	SEPDOWN	
Mass Fractions						
WATER		0.98833	0.909874	0.999056	0.930598	
CARBO-01		0.0002	0.000483465	0	2.96E-05	
PROPI-01		1.00E-05	1.33E-05	1.01E-05	1.37E-05	
N-VAL-01		3.00E-05	0.00149772	3.72E-07	0.00151216	
N-HEX-01		1.00E-05	0.00036925	6.01E-11	0.000366297	
N-BUT-01		2.00E-05	0.000504378	1.16E-05	0.000512455	
FORMI-01		0.0001	1.44E-06	0.000102425	1.50E-06	
ACETI-01		0.0008	1.19E-05	0.000819406	1.24E-05	
VALER-01		0.0006	0.00167945	0	0.000330944	
N-PRO-01		0.0003	0.000879146	0	0.000207146	
N-BUT-02		0.0003	0.0010451	0	0.000382594	
ACETA-01		0.0008	0.00446049	3.50E-14	0.0027895	
METHY-01		0.0001	0.000369374	0	0.00014974	
METHY-02		0.0003	0.00110202	0	0.000442773	
ACETO-01		0.001	0.00553577	0	0.00344477	
2-HEX-01		3.00E-05	0.000105087	0	3.89E-05	
1-PRO-01		0.0012	0.00801943	0	0.00558897	
METHA-01		0.005	0.05917	4.26E-14	0.050516	
ISOPR-01		0.0001	0.000484831	0	0.0002718	
ETHAN-01		4.00E-05	0.000345372	0	0.000268821	
N-BUT-03		0.00055	0.00314623	0	0.002002	
1-PEN-01		0.00017	0.000855097	0	0.000494714	
1-HEX-01		1.00E-05	4.70E-05	0	2.56E-05	
Volume Flow	cum/hr	109.246	48.6799	107.489	45.9148	
Chemical oxygen demand for mixture	fraction	0.0213103	0.158251	0.00094602	0.118219	



X. RESULT

Stream Name	Units	Initial Stage		final stage	
		FEED	WASTE#20	FEED	WASTE#20
Temperature	C	100	109.351	100	109.341
Pressure	bar	1.3	1.4	1.3	1.4
Molar Enthalpy	kcal/mol	-66.8297	-66.7029	-66.8423	-66.6959
Mass Enthalpy	kcal/kg	-3684.1	-3699.26	-3684.8	-3700.2
Molar Entropy	cal/mol-K	-34.8837	-34.3696	-34.9202	-34.369
Mass Entropy	cal/gm-K	-1.92302	-1.9061	-1.92503	-1.90675
Molar Density	kmol/cum	50.4613	50.3675	50.4613	50.3885
Mass Density	kg/cum	915.369	908.197	915.369	908.249
Enthalpy Flow	Gcal/hr	-368.41	-257.398	-368.48	-361.125
Average MW		18.14	18.0314	18.14	18.0249
Mass Flows	kg/hr	100000	69580.8	100000	97596.1
Mass Fractions					
WATER		0.98833	0.998705	0.98833	0.999231
Volume Flow	cum/hr	109.246	76.6143	109.246	107.455
COD Chemical oxygen demand for mixture	fraction	0.0213103	0.00128209	0.02131	0.000798231

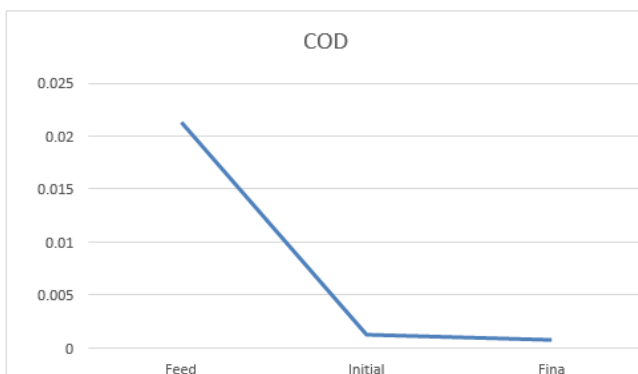


Fig. 11: Graph Showing the COD Results

The elimination of aldehydes, ketones, and alcohols that might alter COD values has been done according to the simulation findings, and we can see a substantial difference from the beginning to the end. The NRTL technique yields a higher Mass Fraction than UNIQUAC HOC with a minimally significant difference, although we might have a higher COD in NRTL than in UNIQUAC HOC.

XI. CONCLUSION

The COD levels in the waste water produced by the Fisher Tropsch process must be optimized in accordance with Indian standards for effluent quality before being released into the environment. As a result, post-treatment of the treated water is necessary. DW SIM is being used in this instance to examine the COD readings inside various waste water treatment system components. Waste water can be utilized for industrial purposes following post-treatment. We used the NRTL approach to produce a large volume of water, according to this analysis. The neutralization device receives the waste water and adjusts its pH. Now, industrial processes may safely use waste water, which is also excellent for the environment.

AIM AND OBJECTIVE

The objective of our study is to analyze water treatment in the Fisher-Tropsch process and eradicate volatile contaminating chemicals. The Volatile Organic Compound (VOC) that significantly contributes to the Chemical Oxygen Demand (COD) of Wastewater. The aim of this investigation is to take advantage of the distillation column and DWSIM modelling software in order to minimize the COD of water and remove contaminants from it.

DECLARATION STATEMENT

Funding	No, did not receive fund from any resources.
Conflicts of Interest	No conflicts of interest to the best of our knowledge.
Ethical Approval and Consent to Participate	No, the article does not require ethical approval and consent to participate with evidence.
Availability of Data and Material/ Data Access Statement	In this research work authors used publicly available data across Ecommerce websites.
Authors Contributions	All authors having equal participation in the article.

REFERENCES

1. Teimouri, Zahra, et al. "Kinetics and Selectivity Study of Fischer-Tropsch Synthesis to C5+ Hydrocarbons: A Review." *Catalysts*, no. 3, MDPI AG, Mar. 2021, p. 330. *Crossref*, doi:10.3390/catal11030330. <https://doi.org/10.3390/catal11030330>
2. Rahman, Nazeri Abdul, et al. "Fischer Tropsch Water Composition Study from Distillation Process in Gas to Liquid Technology with ASPEN Simulation." *Case Studies in Chemical and Environmental Engineering*, Elsevier BV, June 2021, p. 100106. *Crossref*, doi:10.1016/j.cscee.2021.100106. <https://doi.org/10.1016/j.cscee.2021.100106>
3. PubChem. "PubChem." *PubChem*, <https://pubchem.ncbi.nlm.nih.gov/>. Accessed 25 Jan. 2024.
4. Prausnitz, John M., et al. *Molecular Thermodynamics of Fluid-Phase Equilibria*. Pearson Education, 1998.
5. Bandilla, Karl W., and Michael A. Celia. "Active Pressure Management through Brine Production for Basin-Wide Deployment of Geologic Carbon Sequestration." *International Journal of Greenhouse Gas Control*, Elsevier BV, June 2017, pp. 155-67. *Crossref*, doi:10.1016/j.ijggc.2017.03.030. <https://doi.org/10.1016/j.ijggc.2017.03.030>
6. PINES, HERMAN. "Synthesis of Liquid Hydrocarbons (Synthetic Fuels)." *The Chemistry of Catalytic Hydrocarbon Conversions*, Elsevier, 1981, pp. 276-93, <http://dx.doi.org/10.1016/b978-0-12-557160-9.50013-7>.
7. "Fischer Tropsch Water Composition Study from Distillation Process in Gas to Liquid Technology with ASPEN Simulation - ScienceDirect." *ScienceDirect.Com | Science, Health and Medical Journals, Full Text Articles and Books.*, <https://www.sciencedirect.com/science/article/pii/S2666016421000281?via%3Dihub>. Accessed 25 Jan. 2024.
8. Alihellal, Dounia, and Lemmouer Chibane. "Simulation Study of the Effect of Water Removal from Fischer-Tropsch Products on the Process Performance Using a Hydrophilic Membrane Reactor." *Reaction Kinetics, Mechanisms and Catalysis*, no. 2, Springer Science and Business Media LLC, Dec. 2015, pp. 605-21. *Crossref*, doi:10.1007/s11144-015-0961-x. <https://doi.org/10.1007/s11144-015-0961-x>

9. "CORE – Aggregating the World's Open Access Research Papers." *CORE – Aggregating the World's Open Access Research Papers*, https://core.ac.uk/display/39670025?utm_source=pdf&utm_medium=banner&utm_campaign=pdf. Accessed 25 Jan. 2024.
10. Kung, Chun-Chan, et al. "Nitrogen Isotope Fractionations in the Fischer-Tropsch Synthesis and in the Miller-Urey Reaction." *Earth and Planetary Science Letters*, no. 1, Elsevier BV, Dec. 1979, pp. 141–46. *Crossref*, doi:10.1016/0012-821x(79)90072-4. [https://doi.org/10.1016/0012-821x\(79\)90072-4](https://doi.org/10.1016/0012-821x(79)90072-4)
11. Contributors to Wikimedia projects. "DWSIM - Wikipedia." *Wikipedia, the Free Encyclopedia*, Wikimedia Foundation, Inc., 10 July 2011, <https://en.wikipedia.org/wiki/DWSIM>.
12. "Physical Properties." *Encyclopædia Britannica*, Encyclopædia Britannica, <https://www.britannica.com/science/water/Physical-properties>. Accessed 25 Jan. 2024.
13. Poddar, Dr. S. (2020). Novel Simulation and Optimization for the Production of Green Products I.E., Green Gasoline, Green Diesel and Green Waxes. In *International Journal of Innovative Technology and Exploring Engineering* (Vol. 9, Issue 6, pp. 1428–1436). <https://doi.org/10.35940/ijitee.f4569.049620>
14. Tiwari, P., Jain, K., Dubey, K., Ali, M., & Thakur, M. (2020). Feasibility of Fuel Synthesized from Solid Plastic Wastage. In *International Journal of Engineering and Advanced Technology* (Vol. 9, Issue 3, pp. 4165–4169). <https://doi.org/10.35940/ijeat.c6632.029320>
15. Yadav, Mr. R. J., Solanki, S., Saharna, S., Bhardwaj, J., & Ramvijay. (2020). Pyrolysis of Waste Plastic into Fuel. In *International Journal of Recent Technology and Engineering (IJRTE)* (Vol. 9, Issue 1, pp. 2600–2605). <https://doi.org/10.35940/ijrte.a2662.059120>
16. Varma, D. S., & Kumar, D. B. N. (2019). Physical and Mechanical Properties of Self-curing and Self-compacting Concrete using Nanosilica as Mineral Admixture. In *International Journal of Innovative Technology and Exploring Engineering* (Vol. 9, Issue 1, pp. 3527–3530). <https://doi.org/10.35940/ijitee.a5347.119119>
17. Islam, M., Mohamed, S. F., Mahmud, S. H., M, A. K. A., & Saeed, K. A. (2020). Towards A Framework for Development of Operational and Maintenance Cost Model of Highway Project in Malaysia. In *International Journal of Management and Humanities* (Vol. 4, Issue 5, pp. 89–95). <https://doi.org/10.35940/ijmh.e0530.014520>

Disclaimer/Publisher's Note: The statements, opinions and data contained in all publications are solely those of the individual author(s) and contributor(s) and not of the Blue Eyes Intelligence Engineering and Sciences Publication (BEIESP)/ journal and/or the editor(s). The Blue Eyes Intelligence Engineering and Sciences Publication (BEIESP) and/or the editor(s) disclaim responsibility for any injury to people or property resulting from any ideas, methods, instructions or products referred to in the content.