

A smart Dictionary for the Arabic Full-Form Words

Ali EL-Desoky, Marwa Fayz, Doaa Samir

Abstract— *Avery long time is required when searching for a given word in the full-form words dictionary if these words are stored in a single database . A smart enough way is required when designing these type of dictionary in order to decrease the search time as much as possible to speed up the whole process execution time.*

This paper introduces a smart dictionary in which the full-form words are distributed into a large number of tables(files). This dictionary distributes the full-form words over 30 tables each of which holds the words start with the same alphabetic character this make the search easier and faster.

Index Terms—*Arabic, human language technologies (HLT), hybrid, morphological analysis, morphology, natural language processing (NLP), phonetic transcription, phonological analysis, statistical language model (SLM), statistical, syntax.*

I. INTRODUCTION

Arabic is a class of languages where the intended pronunciation of a written word cannot be completely determined by its standard orthographic representation; rather, a set of special diacritics is needed to indicate the intended pronunciation. Different diacritics for the same spelling produce different words with different meanings (e.g. "علم" "science", "علم" "flag" "knew" ... etc.). In most genres of written Arabic results in widespread ambiguities in pronunciation and (in some cases) meaning. Automatic processing of Arabic is often hampered by the lack of diacritics. Text-to-speech (TTS), Part-Of- Speech (POS) tagging, Word Sense Disambiguation (WSD), and Machine Translation can be enumerated among a longer list of applications that vitally benefit from automatic diacritization [1-4]. The Arabic alphabet consists of 28 letters; 25 letters represent the consonants such as ب(pronounced as /b/) and 3 letters represent the long vowels such as ا (both ا, ا, pronounced as /a/), ي (pronounced as /i/), and و (pronounced as /u:/), each of them may have eight different shapes and some combinations of them, representing short vowels, nunation (for doubled case endings), and syllabification marks [5-7]. Combinations of the Shadda diacritic with other diacritics may occur such as Shadda-Fatha (pronounced as /b//b//a/), and Shadda-Tanween_Damma (pronounced as /b//b//un /).

One major challenge with Arabic is its rich derivative and inflective nature, so it is very difficult to build a complete vocabulary that covers all (or even most of) the Arabic generable words [8],[9]. In fact, while Arabic has a very rich vocabulary with regard to full-form words, the resulting data sparseness is much more manageable when atomic entities of

words (morphemes) are considered separately, due to Arabic is very systematic and rich yet compact morphology [10],[11]. Hence, reliable Arabic morphological analysis is crucial for Arabic diacritization. An Arabic diacritization systems that factorize input Arabic text into all the possible morphemes and case diacritics is proposed. This system statistically disambiguate the most likely sequence of these entities via deep lattice search, hence infer the most likely diacritization and phonetic transcription of the input text [12]. While the system is excellent cover the language; its drawback is that the search space for the correct diacritics using the factored word components is much larger than the original search space of full-form words. This larger search space seems to require larger size of training data, which is expensive and time-consuming to build and validate [11]. Recently been trying the same statistical language modeling and disambiguation methodologies over full-form Arabic words instead of factorized ones is proposed. While the letter approach proved to be faster to run and faster to learn; i.e., it produces more accurate diacritization using the same size of training data, it apparently suffers from the problem of poor coverage. It has then been realized that a hybrid of both approaches may again the advantage of each[10]. All of these approaches uses a single database to hold the whole data this required substantial hardware and software start-up costs and any damage to database affects virtually all application programs and make any search time consuming. This paper proposes a simple dictionary in which the full-form words are distributed over a large number of small size tables(files) instead of a single one. This way the problems encountered with large-scale database are overcome.

The paper consists of 5 section the first of which is the introduction. Section II gives a brief review of an Arabic morphological analysis & pos tagging models. Section III explains the structure of the proposed dictionaries. Section IV comparison studies. Finally Section V is devoted for conclusion.

II. THE ARABIC FACTORIZATION MODELS

The diacritization of an Arabic word consists of two components; morphology-dependent and syntax-dependent [13],[14]. The morphological diacritization distinguishes different words with the same spelling from one another; e.g. علم which means "science" and علم which means "flag", the syntactic case of the word within a given sentence; i.e. its role in the parsing tree of that sentence, determine the syntax-dependent diacritic of the word. For example; درستُ implies the syntactic diacritic of the target word - which is an "object" in the parsing tree - is "Fatha", while يفيدُ implies the syntactic diacritic of the target word - which is a "subject" in the parsing tree - is "Damma".

Manuscript Received on November 2012.

Ali EL-Desoky, Department of CSE, University/ Mansoura/EGYPT, India.

Mrwa Fayz, Department of CSE, University/ Mansoura/ EGYPT, India.

Doaa Samir, Department of CSE, University/ Mansoura/ EGYPT, India.

IV. EXPERIMENTAL RESULTS

In this section comparison studies are made between the results obtained from the proposed dictionary and those obtained from Mohammed attia in order to test the validity of the proposed dictionary. hundreds of words are used in the experiment the results of a sample of the words used in the search are given in table 4&5 and figure 4.

Table-4. Size of database against number of records

Database size Gigabyte (Gb)	number of record	Number of Record(ذهب)	Number of Record(شمس)	Number of Record(جماعة)	Number of Record(كلمة)	Number of Record(كلمة)
	Old dictionary	Proposed dictionary	Proposed dictionary	Proposed dictionary	Proposed dictionary	Proposed dictionary
9.16	134,217,728	3924810	3939810	4131810	4197810	4473924
13.4	209,715,200	6240480	6390480	6690480	6090480	69990506
18.8	268,435,456	7897830	8197830	8347830	8647830	8947848
31.4	400,000,000	11359320	12109320	12364320	12733320	13333333
69	536,870,972	14835690	15945690	16845690	17295690	17895699

Table5.size of database against execution time

Database size Gigabyte (Gb)	Execution time(كلمة)		Execution time(ذهب)		Execution time(شمس)		Execution time(جماعة)		Execution time(كلمة)	
	Old dictionary	proposed dictionary	Old dictionary	proposed dictionary	Old dictionary	proposed dictionary	Old dictionary	proposed dictionary	Old dictionary	proposed dictionary
9.16	59	0.400	59	0.490	59	0.520	59	0.560	59	0.600
13.4	60	0.65	60	0.71	60	0.82	60	0.84	60	0.9
18.8	90	1.095	90	1.11	90	1.15	90	1.26	90	1.3
31.4	120	1.470	120	1.690	120	1.720	120	1.850	120	2.000
69	240.7	2.120	240.7	2.199	240.7	2.210	240.7	2.250	240.7	2.259

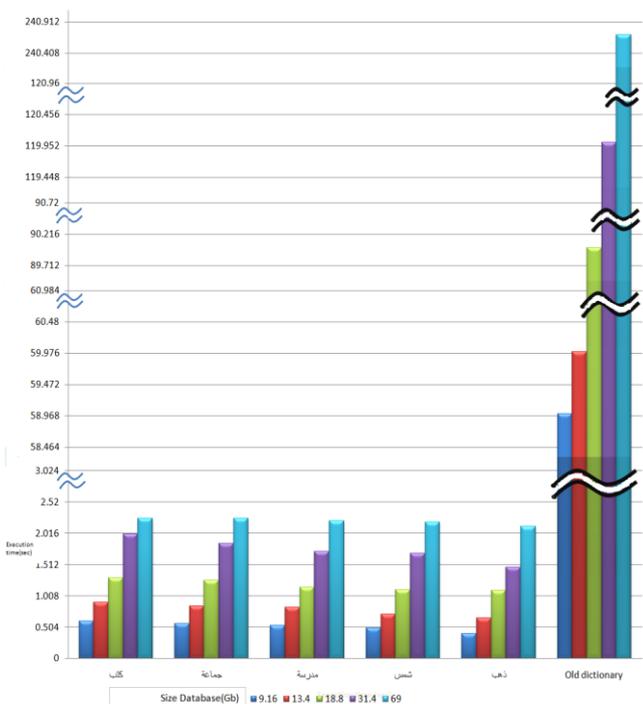


Fig4: Shows size of database against execution time.

V. CONCLUSION

This paper introduced a technique suitable for distributing complex large scale database into a large number of small size

ones. This way the time taken in searching in such database is minimized. These technique is suitable for use in the full form word Arabic dictionary.

From the results obtained from the comparison studies made in section 4 we can conclude the following

- 1) The time taken in the old dictionary almost constant and this time is increased as the size of the database increased (time taken to load the data).
- 2) The time taken in the proposed dictionary is much more less than that taken by the old one.

REFERENCES

1. Otakar Smr, "Yet Another Intro to Arabic NLP",2005, <http://ufal.mff.cuni.cz/~smrz/NLP/anlp-lecture-notes.pdf>
2. Mohsen RASHWAN, Sherif ABDOU, Ahmed RAFAA "Stochastic Arabic Hybrid Diacritizer", IEEE trans. Natural Language Processing and Knowledge Engineering, pp.1-8, 24-27 Sept. 2009
3. Mohamed Attia, Mohsen A. A. Rashwan, and Mohamed A. S. A. A. Al-Badrashiny, " Fassieh@, a Semi-Automatic Visual Interactive Tool for Morphological, PoS-Tags, Phonetic, and Semantic Annotation of Arabic Text Corpora", IEEE trans. AUDIO, SPEECH, AND LANGUAGE PROCESSING, VOL. 17, NO. 5, pp.916-925, JULY 2009
4. http://Archimedes.fas.harvard.edu/docs/Arabic. ", A Hybrid System for Automatic Arabic Diacritization", is found at <http://www.rdi-eg.com> .pp.54-60. Zitouni, J. S. Sorensen, and R. Sarikaya, "Maximum entropy based restoration of Arabic diacritics," in Proc. 21st Int. Conf. Comput. Linguist. and 44th Annual Meeting Assoc. for Comput. Linguist. (ACL); Workshop Comput. Approaches to Semitic Lang., Sydney, Australia, Jul. 2006 [Online]. Available: <http://www.ACLweb.org/anthology/P/P06/P06-1073>
5. Attia, M., Rashwan, M., Khallaaf, G., "A Formalism of Arabic Phonetic Grammar and Application on the Automatic Arabic Phonetic Transcription of Transliterated Words", NEMLAR int'l conference in Cairo, Sept. 2004. This paper is downloadable from <http://www.RDI-eg.com/RDI/Technologies/paper.htm>.
6. Mansour Alghamdi, Zeeshan Muzaffar, "KACST Arabic Diacritizer",2012, <http://www.mghamdi.com/KAD.pdf>
7. Mansour Alghamdi, Muhammad Khurshed, Mustafa Elshafei; Fayz Alhargan,Muhammed Alkanhal, Abu Aus Alshamsan, Saad Alqahtani, Syed Zeeshan Muzaffar, Yasser Altowim, Adnan Yusuf; Husni Almuhtasib , " Automatic Arabic Text Diacritizer", KACST, KFUPM,KSU, MODA, 18-6-2006
8. KHALED SHAALAN,"Arabic Natural Language Processing: Challenges and Solutions", ACMTransactions on Asian Language Information Processing, Vol. 8, No. 4, Article 14, Pub. date: December 2009.
9. Attia,"Automatic-Full-Phonetic-Transcription-of-Arabic-Script-with-and-without-Language-Factorization", http://www.rdieg.com/rdi/technologies/arabic_nlp.htm
10. Mohsen A. A. Rashwan, Mohamed A. S. A. A. Al-Badrashiny, Mohamed Attia, Sherif M. Abdou, and Ahmed Rafea, "A Stochastic Arabic Diacritizer Based on a Hybrid of Factorized and Unfactorized Textual Features" IEEE trans. Audio, speech, and language processing, vol.19, no.1, pp.166-175, january2011.
11. M. Al-Badrashiny, "Automatic diacritization for Arabic texts," M.Sc. thesis, Dept. of Electron. Elect. Commun., Faculty of Eng., Cairo Univ., Cairo, Egypt, Jun. 2009.
12. M. Attia, M. Rashwan, and G. Khallaaf, "On stochastic models, statistical disambiguation, and applications on Arabic NLP problems," in Proc. 3rd Conf. Lang. Eng.; CLE'2002, by Egypt. Soc. Lang. Eng. (ESoLE) [Online]. Available: www.ESoLE.org
13. M. Attia and M. Rashwan, "A large-scale Arabic PoS tagger based on a compact Arabic PoS tags—Set, and application on the statistical inference of syntactic diacritics of Arabic text words," in Proc. Arabic Lang. Technol. Resources Int. Conf.; NEMLAR, Cairo, Egypt, 2004.
14. M. Attia, "A large-scale computational processor of the Arabic morphology, and applications," M.Sc. thesis, Dept. of Comput. Eng., Faculty of Eng., Cairo Univ., Cairo, Egypt, 2000.
15. Muhammad Atiyya ,Khalid Choukri ,Mustafa Yaseen (AU),"NEMLAR Specifications of the Arabic Written Corpus ", http://www.medar.info/The_Nemlar_Project/Publications/WC_design_final.pdf
16. Indiana University,"Learning Arabic Morphology Using Statistical Constraint Satisfaction Models",April 2nd, 2005, http://www.casl.umd.edu/sites/default/files/rodrigues_ALS05_Learning-Arabic-Morphology-Using-Statistical-Constraint-Satisfaction-Models.pdf
17. M. Attia, M. Rashwan, A. Ragheb, M. Al-Badrashiny, H. Al-Basoumy, and S. Abdou, "A Compact Arabic Lexical Semantics Language Resource Based on the Theory of Semantic Fields". Berlin, Heidelberg, Germany: Springer-Verlag, Aug. 2008, vol. 5221 [Online]. Available: www.SpringerOnline.com, Lecture Notes on Computer Science (LNCS): Advances in Natural Language Processing, LNCS/LNAI.
18. M. Attia, "Theory and implementation of a large-scale Arabic phonetic transcripator, and applications," Ph.D. dissertation, Dept. of Electron. and Elect. Commun., Faculty of Eng., Cairo Univ., Cairo, Egypt, Sep. 2005.

